

# EPOXY LINE STRIPING

By the warehouse identification  
& marking specialists

Differences in warehouse and distribution facility budgets and their operational requirements, dictate the level of work allowed prior to applying a warehouse floor striping solution. This is why unprepared methods are often more appropriate than more durable alternatives.

Direct epoxy floor striping is the practice of applying the paint directly to the surface, without prior work to improve adhesion. The performance of this type of floor marking is limited but very effective. The paint can be removed, and layouts altered and once confirmed, can be made more hardwearing later.

As with all our warehouse striping methods, we select the most appropriate paint system for your facility and traffic needs. ASG Services is not restricted to any one paint supplier, and we explore every option before making our recommendation to you.


Our most popular and most used paint system is epoxy.



Even though this method of floor marking is on an 'unprepared' surface, we ensure the concrete surface is free from dirt, dust, and debris before applying the paint. We may request the customer to do this or offer to provide the service additionally. We will not start on an unsuccessful project.

We utilize airless spray systems to apply the paint in this process, other options are available and can be offered during the construction stage.

We are happy to discuss your facility and plans as well as arranging site visits with you, they help address unforeseen issues and establish better understanding.

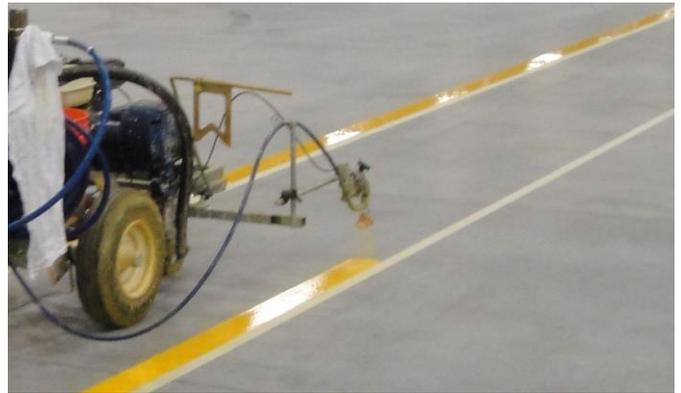

Recommended for use with



Light forklift  
traffic

Medium forklift  
traffic

Heavy forklift  
traffic



ASG Services, LLC

+1 (770) 447-9498 | +1 (877) 447-9798 | [info@asgservices.com](mailto:info@asgservices.com)  
[www.asgservices.com](http://www.asgservices.com) | [www.asgonlinestore.com](http://www.asgonlinestore.com)

